



C4206G

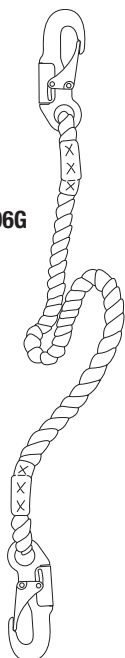

C4206E

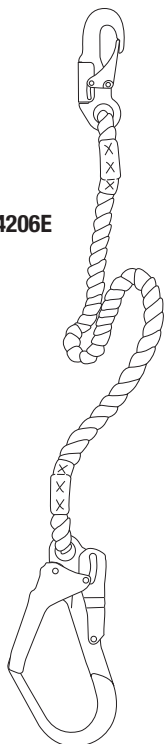

The 1/2-in. (13 mm) rope lanyard is designed to be used as a connecting device in a personal work positioning or travel restraint system. The lanyard connects the user's harness to an anchorage point, anchorage connector or a rope grab/fall arrester. This rope lanyard is made of 1/2-in. (13 mm) diameter nylon rope that is manufactured, using a heat stabilization process to enhance lay tension.

For further information, refer to the "Use and Maintenance Instructions" for harnesses, belts and lanyards.

⚠ WARNING

Must not be used for fall arrest applications unless combined with a shock absorber.

⚠ WARNING


A 6-ft. (1.8 m) fall with a rope lanyard will generate an impact force up to 1,800 lbs. (8 kN). Keep lanyard as short as possible to reduce risks of serious injury.

Feature

- Provides better shock absorption than web lanyards

Sizes

- 3, 4, 5 and 6 ft. (0.9, 1.2, 1.5 and 1.8 m) only.



Size of lanyards are based on measurement from inside to inside hook.

Applications

- Work positioning
- Restraint

Applicable standards

- ANSI Z359.1-1999 and A10.32-2004
- OSHA fall protection requirements

Available models

All lanyards have a 3/8-in. (19 mm) self-locking snap hook at one end.

C4206G 6 ft. (1.8 m) with a 3/4-in. (19 mm) self-locking snap hook on the other end

C4206E 6 ft. (1.8 m) with a 2 1/4-in. (57 mm) self-locking snap hook on the other end

For information on Tractel connectors, refer to technical sheet T-4536.

| PARTS | SPECIFICATIONS | APPLICABLE STANDARDS |
|---|--|--|
| Rope | Nylon 3-strand safety rope Heat set and stabilized Diameter: 1/2 in. (13 mm) Tensile strength: 6,300 lbs. (28 kN) | ANSI Z359.1-1999 CSA Z259.11-05, class E4 |
| Termination | Eye spliced Polyethylene thimble 1/2 in. (13 mm) | |
| 3/4-in. (19 mm) self-locking snap hook | Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN) | ANSI Z359.1-1999 CSA Z259.12-01 |
| 2 1/4-in. (57 mm) self-locking snap hook | Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN) | ANSI Z359.1-1999 CSA Z259.12-01 |
| Capacity | 310 lbs. (140 kg), one person | ANSI Z359.1-1999 CSA Z259.11-05, class E4 |